

AyrKing Corporation

Breader/Blender/Sifter



AyrKing offers a manual breadng workstation with integrated automatic Blender/Sifter machine. Rotary brush sifter operates without detrimental vibration or agitation. Spirally configured nylon bristles form an auger to eject unwanted dough balls to a waste container. Ingredients are fully blended as brush tumbles breadng media before it exits through sifter screen. Unique process prevents dough ball grinding, eliminates usual sifting noise, & blends ingredients as it ejects waste.

Photo of BBS-U-L3927



INCLUDED ACCESSORIES

- B101 Red plastic lug plug
- B105 F/S 8" deep S/S breadng lug w/ hole
- B127 Stainless half size batter pan (2 included)
- B241 Swivel casters, four locking 5"
- B303 White plastic breadng lug without hole
- B313 half size basket with hooks (2 included)
- B336 batter drip guard
- B337 Wisk tray (two included)
- B343 Slide out shelf for half size long cold pan
- CM104202 full size cold pan (two included)
- CM104302 half size long cold pan (2 included)
- Extra sifter brush (B150 or B160) included

OPTIONAL ACCESSORIES

- B303G Gray plastic breadng lug without hole
- B325G Gray plastic lug cover



ADVANTAGES

Sift and blend 30 lbs (14 kg) of breadng in 60 seconds!

Rotary auger brush blends, sifts, and ejects dough balls simultaneously

Blending brush action prevents ingredient segregation, unlike vibrating or agitating systems

Quiet, vibration-free operation creates results, not disturbances

Sixty second timed cycle frees labor and saves energy

Fully enclosed sifter with only four internal parts, reduces dust and allows quick and easy cleaning

Direct drive, steel geared motor & solid stainless steel fabrication provide lasting performance

MODELS




BBS-U-L3927 39"L by 27"W table on casters with sloped overshef

AyrKing Corporation
2013 Cobalt Drive
Louisville, KY 40299-2417

Telephone 502-266-6270
Facsimile 502-266-6274
www.ayrking.com

AyrKing Corporation

Breader/Blender/Sifter

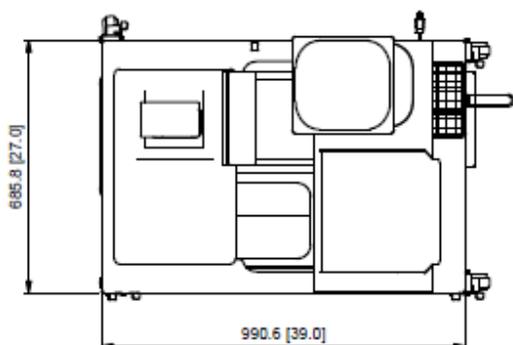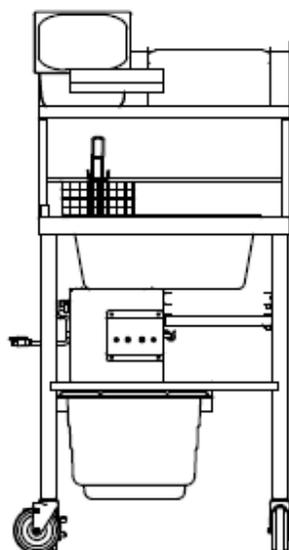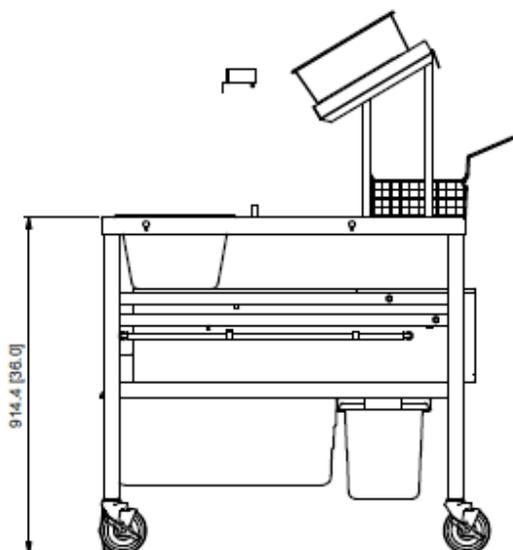

CRATED MEASUREMENTS

<u>MODEL</u>	<u>LENGTH</u>	<u>WIDTH</u>	<u>HEIGHT</u>	<u>WEIGHT</u>	<u>UNCRATED</u>
BBS-U-L3927	44" (1118mm)	31" (787mm)	62" (1575mm)	267 lb (121kg)	232 lb (105kg)

ELECTRICAL

Timed control board automatically senses voltage & operates at either:

115V, 50/60Hz, 1 phase, 1.6 AMP, 184W

230V, 50/60Hz, 1 phase, 0.9 AMP, 207W

Includes universal male three prong, recessed

AC receptacle (IEC 320 C13) mating to a 10 foot

(3048mm) coiled cord with NEMA 5-15P male three prong plug

WARRANTY

One Year Parts

Ninety Days Labor

No Travel Time

Specifications subject to change without notice. Version 03/17

AyrKing Corporation
2013 Cobalt Drive
Louisville, KY 40299-2417

Telephone 502-266-6270
Facsimile 502-266-6274
www.ayrking.com