

AyrKing Corporation

Breader/Blender/Sifter



AyrKing offers a manual breadng workstation with integrated automatic Blender/Sifter machine. Rotary brush sifter operates without detrimental vibration or agitation. Spirally configured nylon bristles form an auger to eject unwanted dough balls to a waste container. Ingredients are fully blended as brush tumbles breadng media before it exits through sifter screen. Unique process prevents dough ball grinding, eliminates usual sifting noise, & blends ingredients as it ejects waste.

Photo of BBS-U-L3927GC



INCLUDED ACCESSORIES

- B101 Red plastic lug plug
- B106 stainless breadng lug with hole
- B107 stainless lug cover
- B104 stainless 1/3 size pan
- B127 stainless half size pan
- B128 stainless 2/3 size pan
- B241 Swivel casters, four locking 5" (13mm)
- B303 White plastic breadng lug without hole
- B129 half size basket w/handles (2 included)
- B336 batter drip guard
- B345 slide out shelf holds B127

OPTIONAL ACCESSORIES

- B511 Rear add-on shelf for 2nd breadng area
- B303G Gray plastic breadng lug without hole

ADVANTAGES

- Sift and blend 30 lbs (14 kg) of breadng in 60 seconds!
- Rotary auger brush blends, sifts, and ejects dough balls simultaneously
- Blending brush action prevents ingredient segregation, unlike vibrating or agitating systems
- Quiet, vibration-free operation creates results, not disturbances
- Sixty second timed cycle frees labor and saves energy
- Fully enclosed sifter with only four internal parts, reduces dust and allows quick and easy cleaning
- Direct drive, steel geared motor & solid stainless steel fabrication provide lasting performance
- Optional rear fold-down shelf to hold additional stainless breadng pan

MODEL


BBS-U-L3927GC 39"L by 27"W table with sloped overshelf

AyrKing Corporation
2013 Cobalt Drive
Louisville, KY 40299-2417

Telephone 502-266-6270
Facsimile 502-266-6274
www.ayrking.com

AyrKing Corporation

Breader/Blender/Sifter

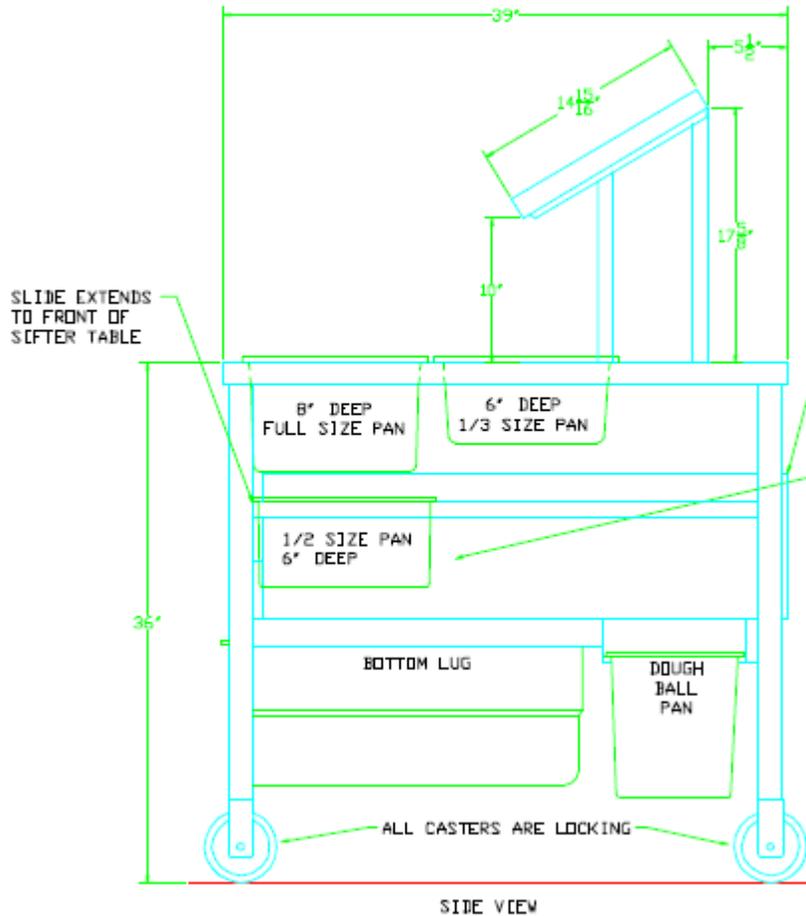

SIDE VIEW

CRATED MEASUREMENTS

MODEL	LENGTH	WIDTH	HEIGHT	WEIGHT	UNCRATED
BBS-U-L3927GC	41" (1041mm)	29" (737mm)	64" (1626mm)	235 lb (107kg)	200 lb (91kg)

ELECTRICAL

Timed control board automatically senses voltage & operates at either:
 115V, 50/60Hz, 1 phase, 1.6 AMP, 184W
 230V, 50/60Hz, 1 phase, 0.9 AMP, 207W
 Includes universal male three prong, recessed
 AC receptacle (IEC 320 C13) mating to a 10 foot
 (3048mm) coiled cord with NEMA 5-15P male three prong plug

WARRANTY

One Year Parts
 Ninety Days Labor
 No Travel Time

Specifications subject to change without notice. Version 12/12

AyrKing Corporation
 2013 Cobalt Drive
 Louisville, KY 40299-2417

Telephone 502-266-6270
 Facsimile 502-266-6274
www.ayrking.com