# Breader/Blender/Sifter

SPECIFICATION

**The AyrKing BBSUL1524** is a portable automatic Blender/Sifter machine thanks to its' small footprint and lockable casters. AyrKing's rotary brush sifter operates without detrimental vibration or agitation. AyrKing's brush is made of spirally configured nylon bristles which form an auger to eject unwanted dough balls to waste container. During the sifting process ingredients are fully blended as the brush tumbles breading media before it exits through the sifter screen. AyrKing's unique process prevents dough ball grinding, eliminates the usual sifting noise, & blends ingredients as it ejects waste.

## ADVANTAGES

- Sift and blend 10 lbs (4.5 kg) of breading in 60 seconds
- Rotary auger brush blends, sifts, and ejects dough balls simultaneously
- Blending brush action prevents ingredient segregation, unlike vibrating or agitating systems
- Quiet, vibration-free operation creates results, not disturbances
- Sixty second timed cycle frees labor and saves energy
- Fully enclosed sifter with only three internal parts, reduces dust and allows quick and easy cleaning
- Direct drive, steel geared motor & solid stainless steel fabrication provide lasting performance
- Lockable casters and small footprint make this the ultimate portable breading station

## INCLUDED ACCESSORIES

| | |
|---|---|
| **B631** | Swivel Casters, Four Locking 3.5" |
| **B101S** | Red Plastic Lug Plug (QTY. 2) |
| **B128H-6in** | S/S 2/3 Size Breading Lug, 6" Deep w/Hole (QTY. 2) |
| **B150M** | Black Bristle 12" Sifter Brush |
| **B201M** | S/S 12" Brush Cover |
| **B202M** | 12" Sifter Screen |
| **B304** | White Plastic Dough Ball Pan |
| **B219H** | Brush Hanger |

## OPTIONAL ACCESSORIES

| | |
|---|---|
| **B129** | 2/3 Size Stainless Steel Coating Basket |

## MODELS

**BBSUL1524**

| MODELS | CRATED MEASUREMENTS | | | | UNCRATED |
|---|---|---|---|---|---|
| | LENGTH | WIDTH | HEIGHT | WEIGHT | WEIGHT |
| BBSUL1524 | 36" (915mm) | 18" (457mm) | 29" (737mm) | 136 lb (61.7kg) | 88 lb (39.9kg) |

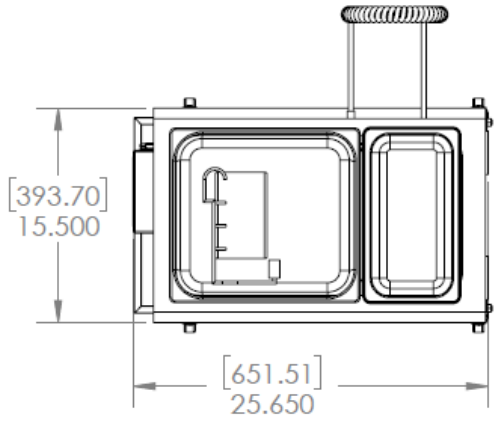


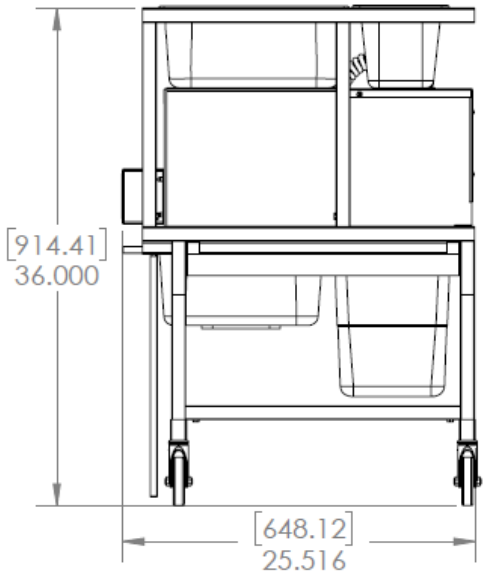


## ELECTRICAL

Timed control board automatically senses voltage & operates at either:

**115V,** 50/60Hz, 1 phase, 2.3 AMP, 184W

**230V,** 50/60Hz, 1 phase, 1.2 AMP, 207W

Includes universal male three prong, recessed AC receptacle (IEC 320 C13) mating to an 10 foot (3048mm) cord with NEMA 5-15P male three prong plug

## WARRANTY

One Year Parts

Ninety Days Labor

No Travel Time

2013 Cobalt Drive
Louisville, KY 40299-2417
502.266.6270 | ayrking.com

Specifications subject to change without notice. Version 09/2024