

# AyrKing Corporation

# Breader/Blender/Sifter



AyrKing offers a manual breadng workstation with integrated automatic Blender/Sifter machine. Rotary brush sifter operates without detrimental vibration or agitation. Spirally configured nylon bristles form an auger to eject unwanted dough balls to a waste container. Ingredients are fully blended as brush tumbles breadng media before it exits through sifter screen. Unique process prevents dough ball grinding, eliminates usual sifting noise, & blends ingredients as it ejects waste.

Photo of BBS-U-L3622



## **INCLUDED PARTS**

- B101 Red plastic lug plug
- B104-4 Third Size S/S Pan, 4" Deep
- B106 Full Size S/S Pan, 8" Deep
- B127 Half Size S/S Pan, 6" Deep (Qty2)
- B150S 20" Black Bristle Sifter Brush
- B219 Brush Posts (Qty2)
- B241 Swivel casters, four locking 5"
- B411 S/S C-Clip for F/S sheet pan (Qty2)
- B259 Sloped Shelf for Drain Pan
- B104B Third Size Pan Bracket
- B127B Half Size Pan Bracket
- B258 Glove Hooks (Qty2)
- B302K Plastic Breadng Lug w/ Hole
- B230 Drip Guard
- B260 Glove Box Holder



## **ADVANTAGES**

Sift and blend 30 lbs (14 kg) of breadng in 60 seconds!

Rotary auger brush blends, sifts, and ejects dough balls simultaneously

Blending brush action prevents ingredient segregation, unlike vibrating or agitating systems

Quiet, vibration-free operation creates results, not disturbances

Sixty second timed cycle frees labor and saves energy

Fully enclosed sifter with only three internal parts, reduces dust and allows quick and easy cleaning

Direct drive, steel geared motor & solid stainless steel fabrication provide lasting performance

Half size batter pan and sheet pan clips are reversible to best fit flow of kitchen

## **MODELS**


BBS-U-L3622 36"L by 22"W Breadng/Sifter Station

AyrKing Corporation  
2013 Cobalt Drive  
Louisville, KY 40299-2417

Telephone 502-266-6270  
Facsimile 502-266-6274  
[www.ayrking.com](http://www.ayrking.com)

# AyrKing Corporation

# Breader/Blender/Sifter

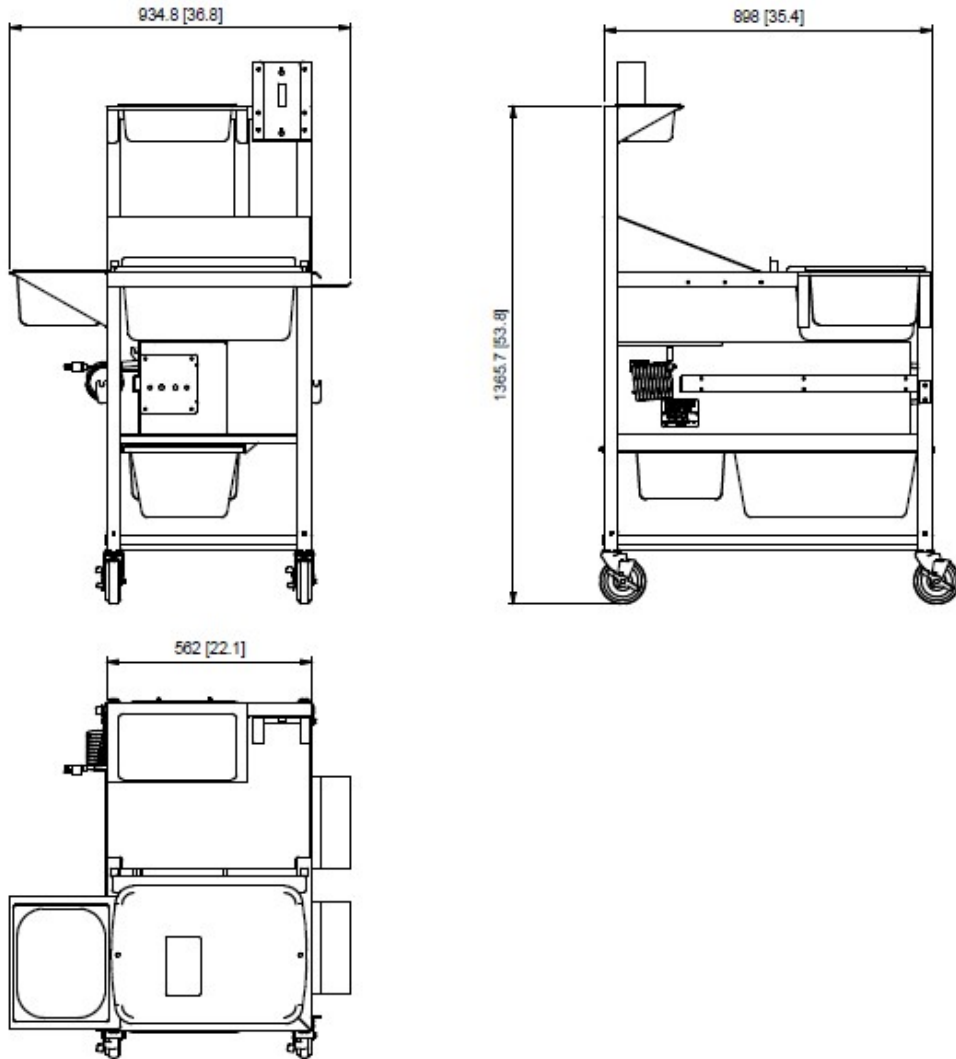

### CRATED MEASUREMENTS

<u>MODEL</u>	<u>LENGTH</u>	<u>WIDTH</u>	<u>HEIGHT</u>	<u>WEIGHT</u>	<u>UNCRATED</u>
BBS-U-L3622	40" (1016mm)	27" (686mm)	61" (1550mm)	227lb (103kg)	174 lb (79kg)

### ELECTRICAL

Timed control board automatically senses voltage & operates at either:

115V, 50/60Hz, 1 phase, 1.6 AMP, 184W

230V, 50/60Hz, 1 phase, 0.9 AMP, 207W

Includes universal male three prong, recessed

AC receptacle (IEC 320 C13) mating to an 8 foot

(2438mm) cord with NEMA 5-15P male three prong plug

### WARRANTY

One Year Parts

Ninety Days Labor

No Travel Time

Specifications subject to change without notice. Version 03/18

AyrKing Corporation  
2013 Cobalt Drive  
Louisville, KY 40299-2417

Telephone 502-266-6270  
Facsimile 502-266-6274  
www.ayrking.com