

# AyrKing Corporation

# Breader/Blender/Sifter



AyrKing offers a breadng workstation and automatic Blender/Sifter machine with removable ice bath prep area. Rotary brush sifter operates without detrimental vibration or agitation. Spirally configured nylon bristles form an auger to eject unwanted dough balls to waste container. Ingredients are fully blended as brush tumbles breadng media before it exits through sifter screen. Unique process prevents dough ball grinding, eliminates usual sifting noise, & blends ingredients as it ejects waste.



Shown but not included are 1/2 size bun pan & 1/3 size pan

## **INCLUDED ACCESSORIES**

- B101 Red plastic lug plug
- B128H Stainless steel breadng lug, two thirds size 8" deep w/ hole
- B106 Stainless steel breadng lug, full size 8" deep w/o hole
- B304 White plastic dough ball pan
- B313NH Dip basket, stainless steel wire w/o hook
- B127 Stainless steel batter pan
- B411 C-Clip Bun Pan Holder
- 3600071 Swivel caster, locking 3.5"

## **Optional Accessory**

- B104 Stainless steel third size 6" deep pan



## **ADVANTAGES**

Sift and blend 25 lbs (11 kg) of breadng in 60 seconds!

Rotary auger brush blends, sifts, and ejects dough balls simultaneously

Blending brush action prevents ingredient segregation, unlike vibrating or agitating systems

Quiet, vibration-free operation creates results, not disturbances

Sixty second timed cycle frees labor and saves energy

Fully enclosed sifter with only three internal parts, reduces dust and allows quick and easy cleaning

Direct drive, steel geared motor & solid stainless steel fabrication provide lasting performance

Integrated, insulated ice bath well holds half and third size pans

## **MODEL**


BBS-U-3515P 35"L by 15"W by 36"H sifter table on casters with removable ice bath well

AyrKing Corporation  
2013 Cobalt Drive  
Louisville, KY 40299-2417

Telephone 502-266-6270  
Facsimile 502-266-6274  
www.ayrking.com

AyrKing Corporation

# Breader/Blender/Sifter

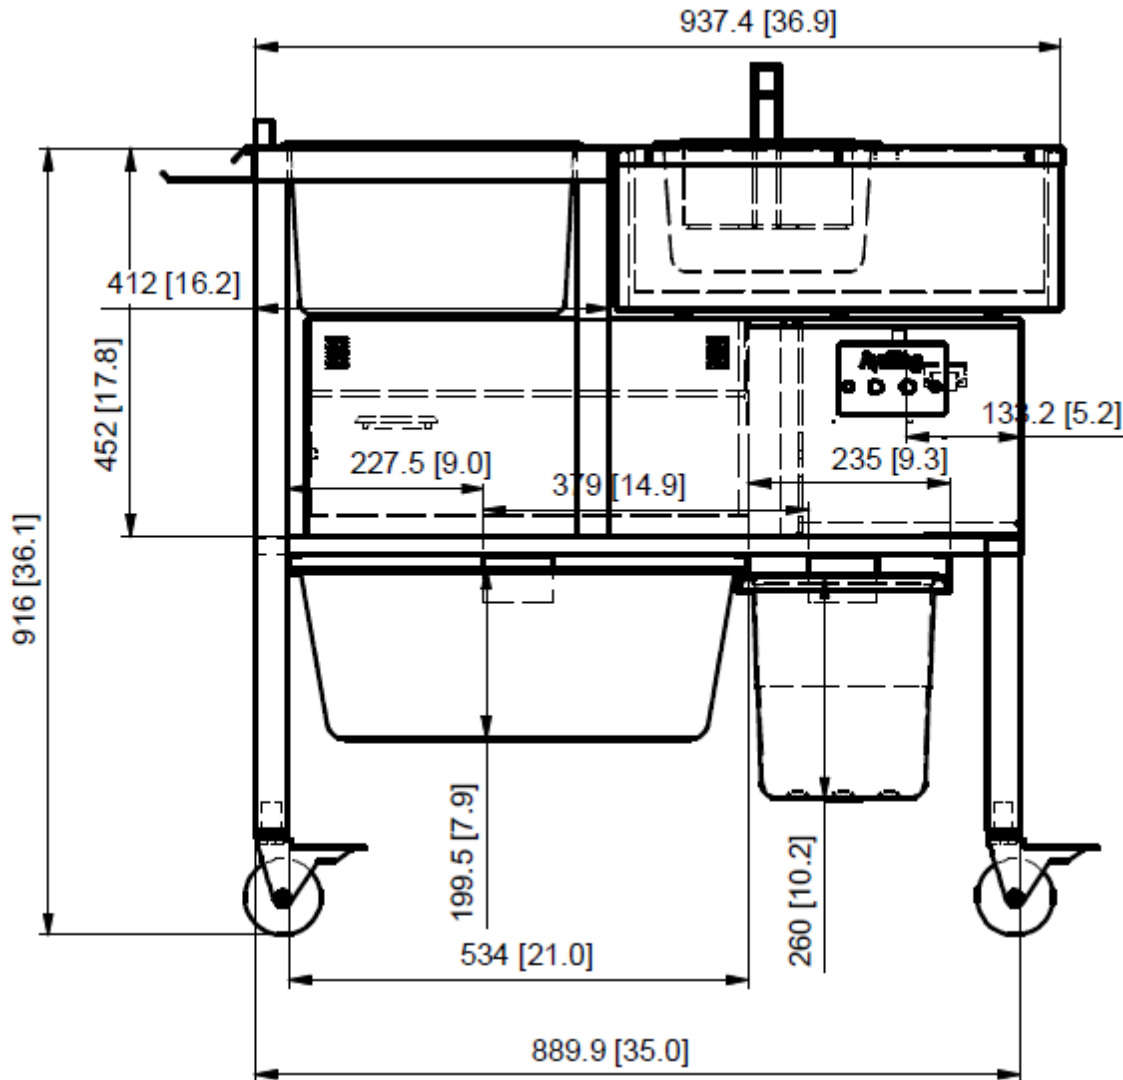

### CRATED MEASUREMENTS

**MODEL**  
BBS-U-3515P

<u>LENGTH</u>	<u>WIDTH</u>	<u>HEIGHT</u>	<u>WEIGHT</u>
37" (940mm)	17" (432mm)	45" (1143mm)	168 lb (76 kg)

**UNCRATED**  
135 lb (61 kg)

### ELECTRICAL

Timed control board automatically senses voltage & operates at either:  
 115V, 50/60Hz, 1 phase, 1.6 AMP, 184W  
 230V, 50/60Hz, 1 phase, 0.9 AMP, 207W  
 Includes universal male three prong, recessed  
 AC receptacle (IEC 320 C13) mating to an 8 foot  
 (2438mm) cord with NEMA 5-15P male three prong plug

### WARRANTY

One Year Parts  
 Ninety Days Labor  
 No Travel Time

Specifications subject to change without notice. Version 03/14

AyrKing Corporation  
 2013 Cobalt Drive  
 Louisville, KY 40299-2417

Telephone 502-266-6270  
 Facsimile 502-266-6274  
[www.ayrking.com](http://www.ayrking.com)