Breader/Blender/Sifter

SPECIFICATION

The AyrKing BBSU5730BP is a manual breading workstation featuring an integrated automatic Blender/Sifter. Its rotary brush sifter uses spirally configured nylon bristles to blend breading ingredients while separating and ejecting unwanted doughballs into a waste container without excessive vibration or agitation. As the breading passes through the sifter, the brush thoroughly mixes ingredients to maintain a consistent blend. This unique process prevents dough ball grinding, reduces operating noise, and continuously blends ingredients while removing waste.

ADVANTAGES

- Sift and blend 30 lbs (14 kg) of breading in 60 seconds
- Rotary auger brush blends, sifts, and ejects dough balls simultaneously
- Blending brush action prevents ingredient segregation, unlike vibrating or agitating systems
- Quiet, vibration-free operation creates results, not disturbances
- Sixty second timed cycle frees labor and saves energy
- Raised stainless steel lip around sifter opening prevents tabletop spills from contaminating sifted breading
- With only three internal parts, the fully enclosed sifter reduces dust and allows for quick and easy cleaning
- Direct drive, steel geared motor & solid stainless steel fabrication provide lasting performance

INCLUDED ACCESSORIES

B101	Red Plastic Lug Plug
B122	S/S Round Wire Dip Basket
B123	S/S Round Dip Pot
B302	White Plastic Breading Lug w/Hole
B303	White Plastic Breading Lug w/o Hole
B304	White Plastic Dough Ball Pan
B325	White Plastic Lug Cover
B150	Brush Assembly Black 24"
B201	S/S 24" Brush Cover
B202	S/S 24" Sifter Screen
B224	S/S 24"H Back Panel

OPTIONAL ACCESSORIES

B124	S/S Round Dip Pot Lid
B126	S/S Wire Feathering Basket
B241	5" Locking Swivel Casters
B420	Bun Pan Rack

MODELS

BBSU5730BPRH	Right Flow Sifter (Shown)
BBSU5730BPLH	Left Flow Sifter

MODELS	CRATED MEASUREMENTS				UNCRATED WEIGHT
	LENGTH	WIDTH	HEIGHT	WEIGHT	
BBSU5730BP	60" (1524mm)	34" (864mm)	46" (1168mm)	270 lb (122kg)	225 lb (102kg)

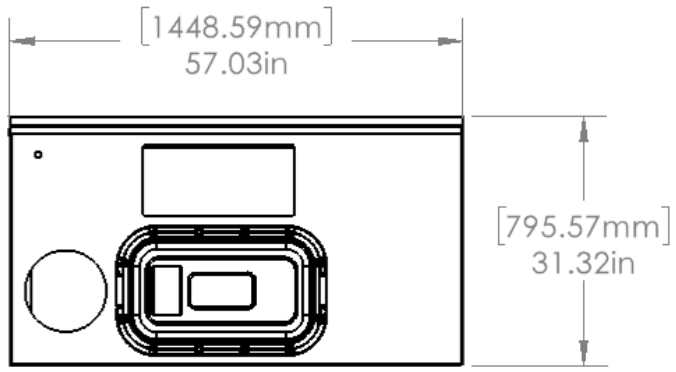

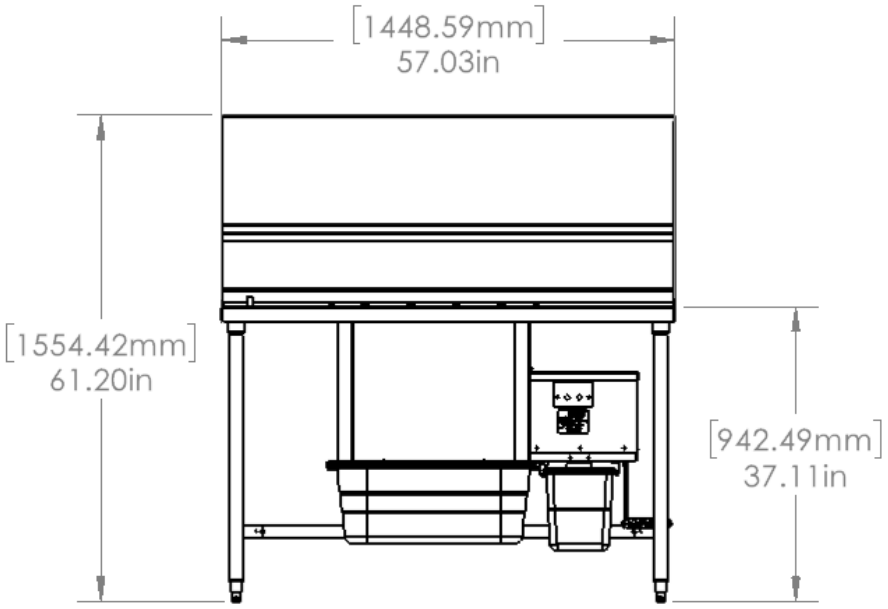

ELECTRICAL

Timed control board automatically senses voltage & operates at either:

115V, 50/60Hz, 1 phase, 2.3 AMP, 125W

230V, 50/60Hz, 1 phase, 1.2 AMP, 125W

Includes universal male 3-prong, recessed AC receptacle (B145)

Female 3-prong plug (IEC 320 C13) mating to a 10 foot (3048mm) cord with male 3-prong plug (NEMA 5-15P)

WARRANTY

One Year Parts

Ninety Days Labor

No Travel Time

2013 Cobalt Drive
Louisville, KY 40299-2417
502.266.6270 | ayrking.com

Specifications subject to change without notice. Version 07/2026